


MA5106 Round Speaker Installation Guide

Cutout and use as template for drilling

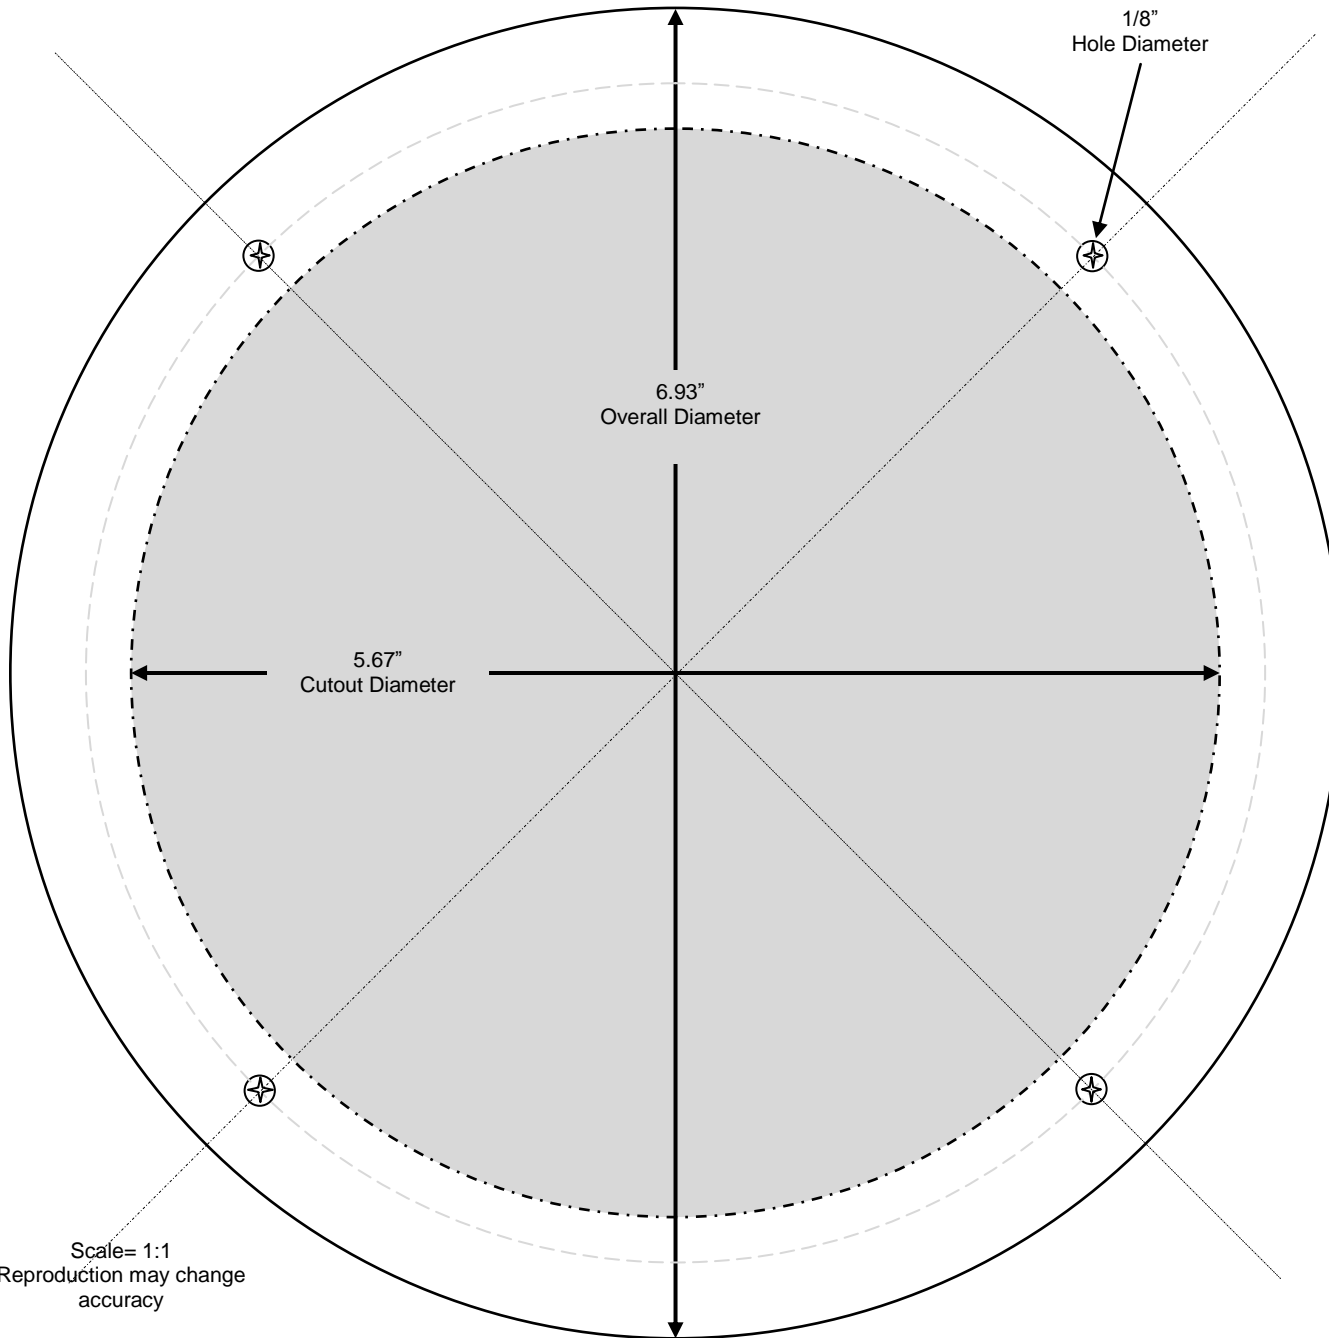

Scale= 1:1
Reproduction may change
accuracy

Installation: Find a suitable location making sure there is clearance for the installed depth. Use a hole saw or other suitable device to make a cutout.

Place the speaker in the cutout and mark and drill holes for the mounting screws (supplied). If the panel is too thin or soft for screws use a stainless screw clips.

Attach speaker wires supplied, solid color wire to positive (red dot or with + sign or larger tab as shown on the diagram).

